Appliations

HAND OPERATED VALVE

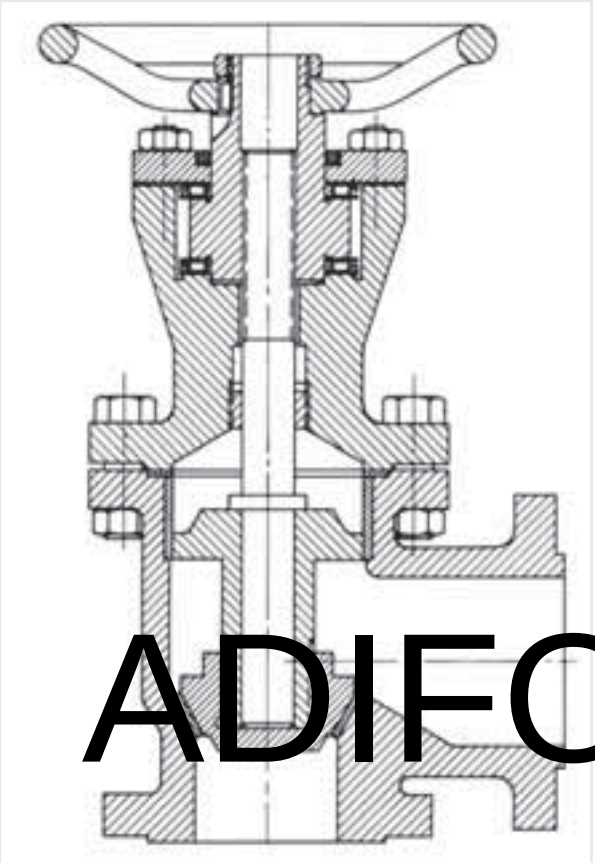

Threaded spindle support mounted between two needle thrust bearings, i.e. AX 45 65 (with matching thrust races) ensures .low frictional characteristics and easy manual operation.

ADIFOR AERO

[illegible]